


Pentoda reg.

EF 183


Telefunken

Wzmacniacz w.cz.

Nowal





$U_z = 6,3 \text{ V}$
 $I_z = 300 \text{ mA}$



Wartości charakterystyczne

| | | | | |
|----------------|------|------|------|------------|
| U_a | 170 | 200 | 230 | V |
| U_{s2} | 90 | 90 | 90 | V |
| U_{s3} | 0 | 0 | 0 | V |
| I_a | 14 | 12 | 10,5 | mA |
| I_{s2} | 5,3 | 4,5 | 3,6 | mA |
| U_{s1} | -1,8 | -2,0 | -2,1 | V |
| S_a | 14 | 12,5 | 10,6 | mA/V |
| ρ_a | 350 | 500 | 650 | k Ω |
| $r_{we}^{(1)}$ | 11,6 | 13 | 15,3 | k Ω |
| $r_{sz}^{(1)}$ | — | 490 | — | Ω |

¹⁾ 40 MHz

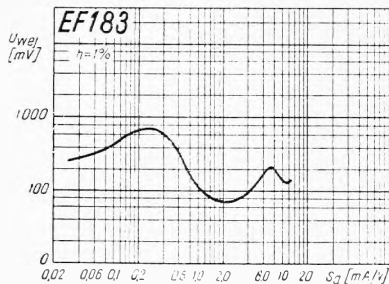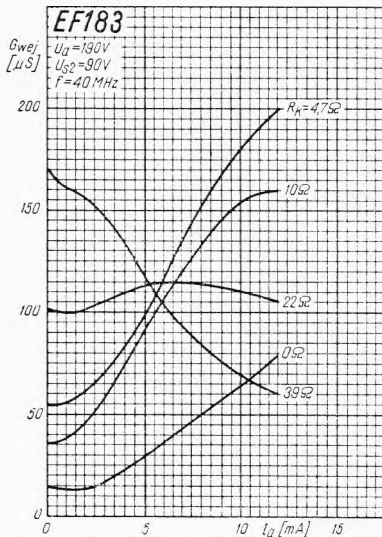

TYPY PODOBNE

6EH7

