

Rectifier diode fast, high-voltage

BY459-1500

GENERAL DESCRIPTION

Glass-passivated double diffused rectifier diode in a plastic envelope, featuring fast forward recovery and low forward recovery voltage. The device is intended for use in multi-sync monitor deflection circuits up to 82kHz.


QUICK REFERENCE DATA

SYMBOL	PARAMETER	MAX.	UNIT
V_{RRM}	Repetitive peak reverse voltage	1500	V
V_F	Forward voltage	1.2	V
$I_{F(AV)}$	Average forward current	10	A
I_{FSM}	Non-repetitive peak forward current	100	A
t_{fr}	Forward recovery time	250	ns
V_{fr}	Forward recovery voltage	14	V


PINNING - TO220AC

PIN	DESCRIPTION
1	cathode (k)
2	anode (a)
tab	cathode (k)

PIN CONFIGURATION

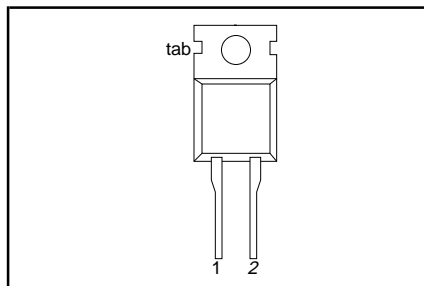

SYMBOL

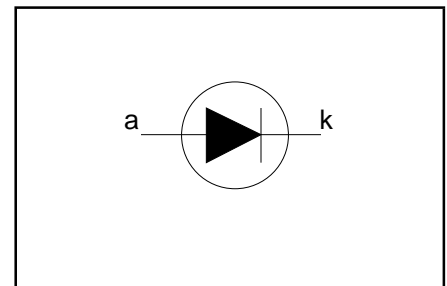

LIMITING VALUES

Limiting values in accordance with the Absolute Maximum System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{RSM}	Non repetitive peak reverse voltage		-	1500	V
V_{RRM}	Repetitive peak reverse voltage		-	1500	V
V_{RWM}	Crest working reverse voltage		-	1300	V
$I_{F(AV)}$	Average forward current ¹	sinusoidal; a = 1.57; $T_{mb} \leq 125\text{ }^\circ\text{C}$	-	10	A
$I_{F(RMS)}$	RMS forward current		-	15.7	A
I_{FRM}	Repetitive peak forward current	sinusoidal; a = 1.57	-	100	A
I_{FSM}	Non repetitive peak forward current	t = 10 ms	-	100	A
		t = 8.3 ms	-	110	A
		sinusoidal; $T_j = 150\text{ }^\circ\text{C}$ prior to surge; with reapplied $V_{RWM(max)}$	-		
I^2t	I^2t for fusing	t = 10 ms	-	50	A ² s
T_{stg}	Storage temperature		-40	150	$^\circ\text{C}$
T_j	Operating junction temperature		-	150	$^\circ\text{C}$

THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$R_{th\ j-mb}$	Thermal resistance junction to mounting base		-	-	1.5	K/W
$R_{th\ j-a}$	Thermal resistance junction to ambient	in free air	-	60	-	K/W

¹ Neglecting switching and reverse current losses.

Rectifier diode
fast, high-voltage

BY459-1500

STATIC CHARACTERISTICS

$T_j = 25\text{ }^\circ\text{C}$ unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_F	Forward voltage	$I_F = 6.5\text{ A}$	-	0.95	1.3	V
		$I_F = 6.5\text{ A}; T_j = 125\text{ }^\circ\text{C}$	-	0.85	1.2	V
I_R	Reverse current	$V_R = V_{RWMmax}$	-	-	0.25	mA
		$V_R = V_{RWMmax}; T_j = 125\text{ }^\circ\text{C}$	-	-	1.0	mA

DYNAMIC CHARACTERISTICS

$T_j = 25\text{ }^\circ\text{C}$ unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_{fr}	Forward recovery voltage	$I_F = 6.5\text{ A}; dl_F/dt = 50\text{ A}/\mu\text{s}$	-	8	14	V
t_{fr}	Forward recovery time	$I_F = 6.5\text{ A}; dl_F/dt = 50\text{ A}/\mu\text{s}; V_F = 5\text{ V}$	-	170	250	ns
		$I_F = 6.5\text{ A}; dl_F/dt = 50\text{ A}/\mu\text{s}; V_F = 2\text{ V}$	-	350	-	ns
t_{rr}	Reverse recovery time	$I_F = 1\text{ A}; -dl_F/dt = 50\text{ A}/\mu\text{s}; V_R \geq 30\text{ V}$	-	250	350	ns

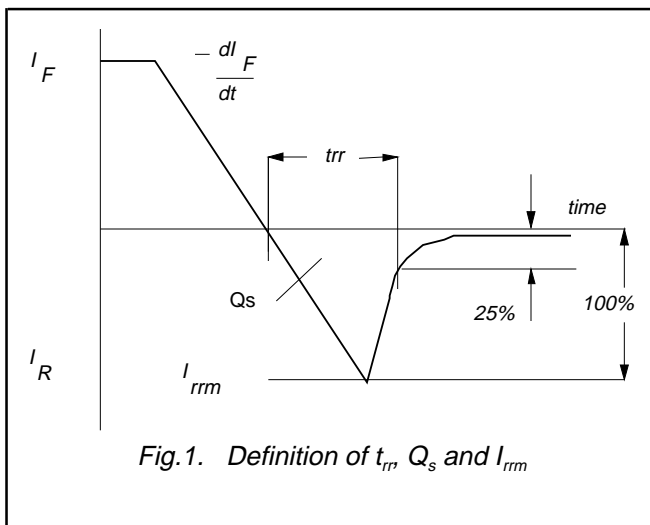


Fig.1. Definition of t_{rr} , Q_s and I_{rrm}

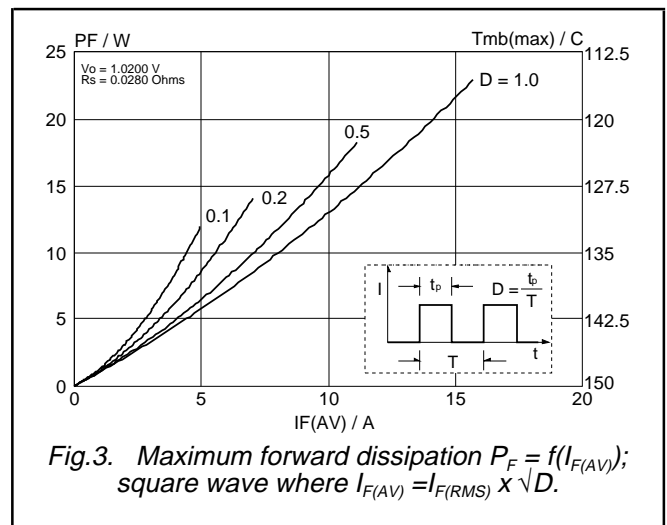


Fig.3. Maximum forward dissipation $P_F = f(I_{F(AV)})$; square wave where $I_{F(AV)} = I_{F(RMS)} \times \sqrt{D}$.

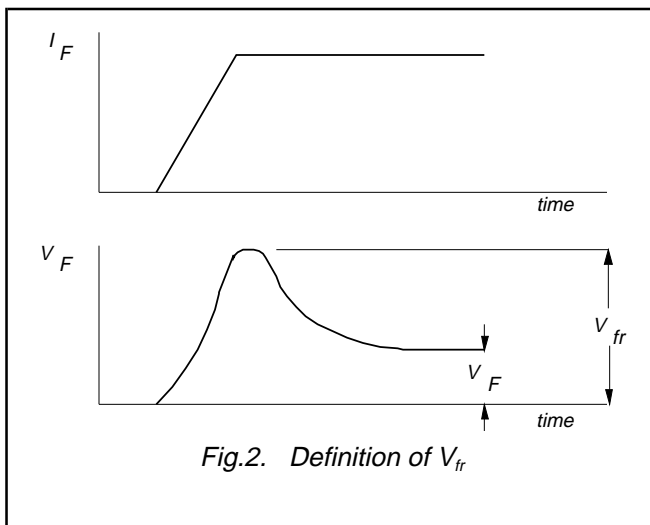


Fig.2. Definition of V_{fr}






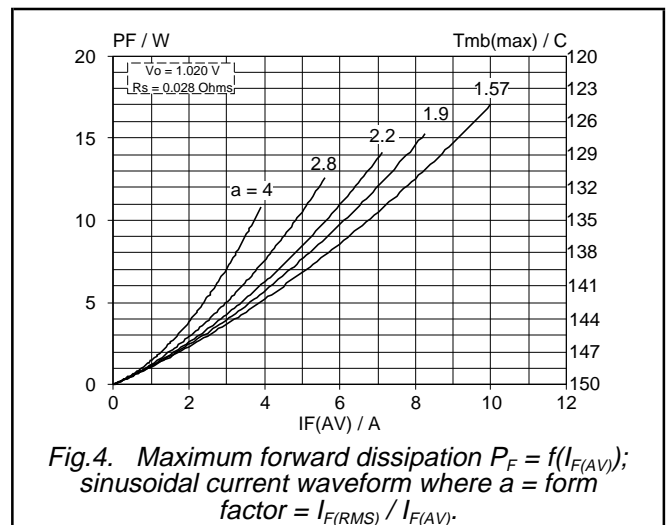


Fig.4. Maximum forward dissipation $P_F = f(I_{F(AV)})$; sinusoidal current waveform where $a = \text{form factor} = I_{F(RMS)} / I_{F(AV)}$.

Rectifier diode
fast, high-voltage


BY459-1500

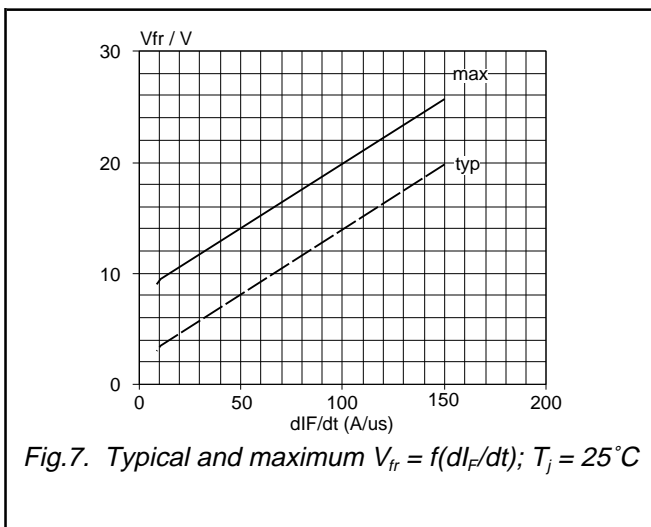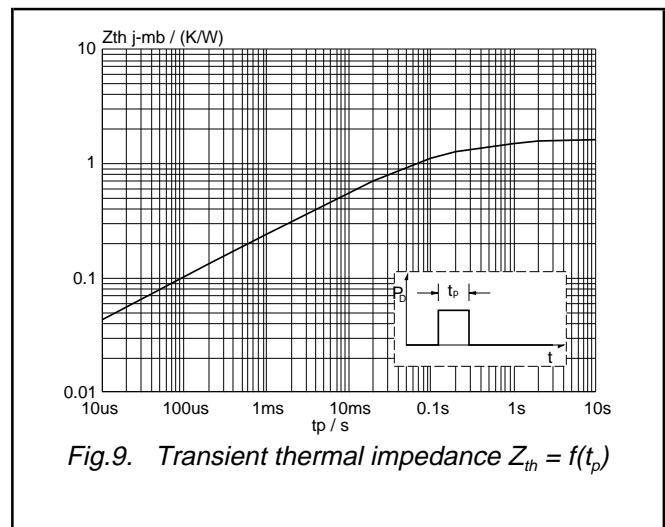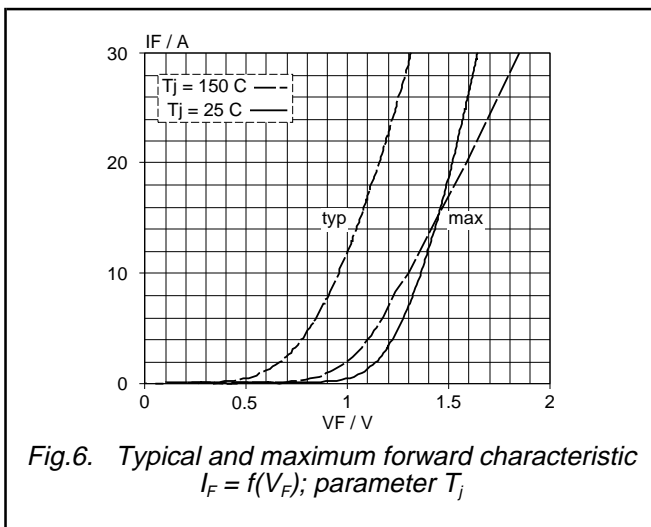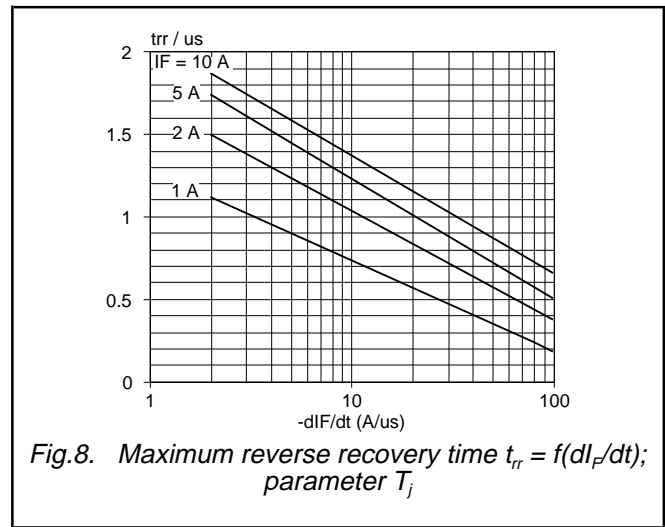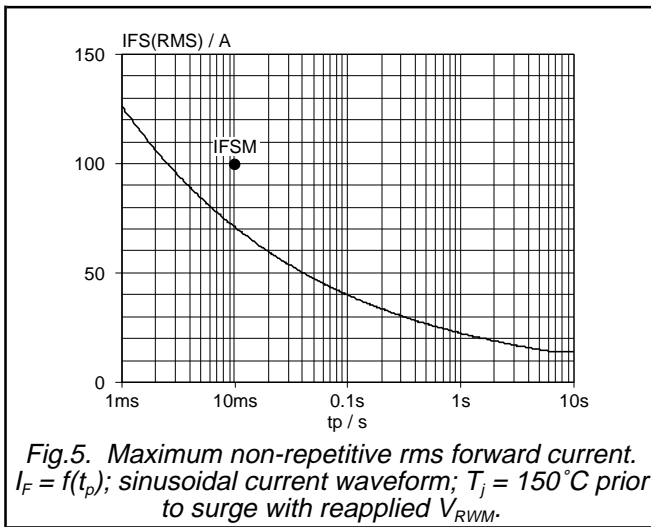

Rectifier diode
fast, high-voltage

BY459-1500

MECHANICAL DATA

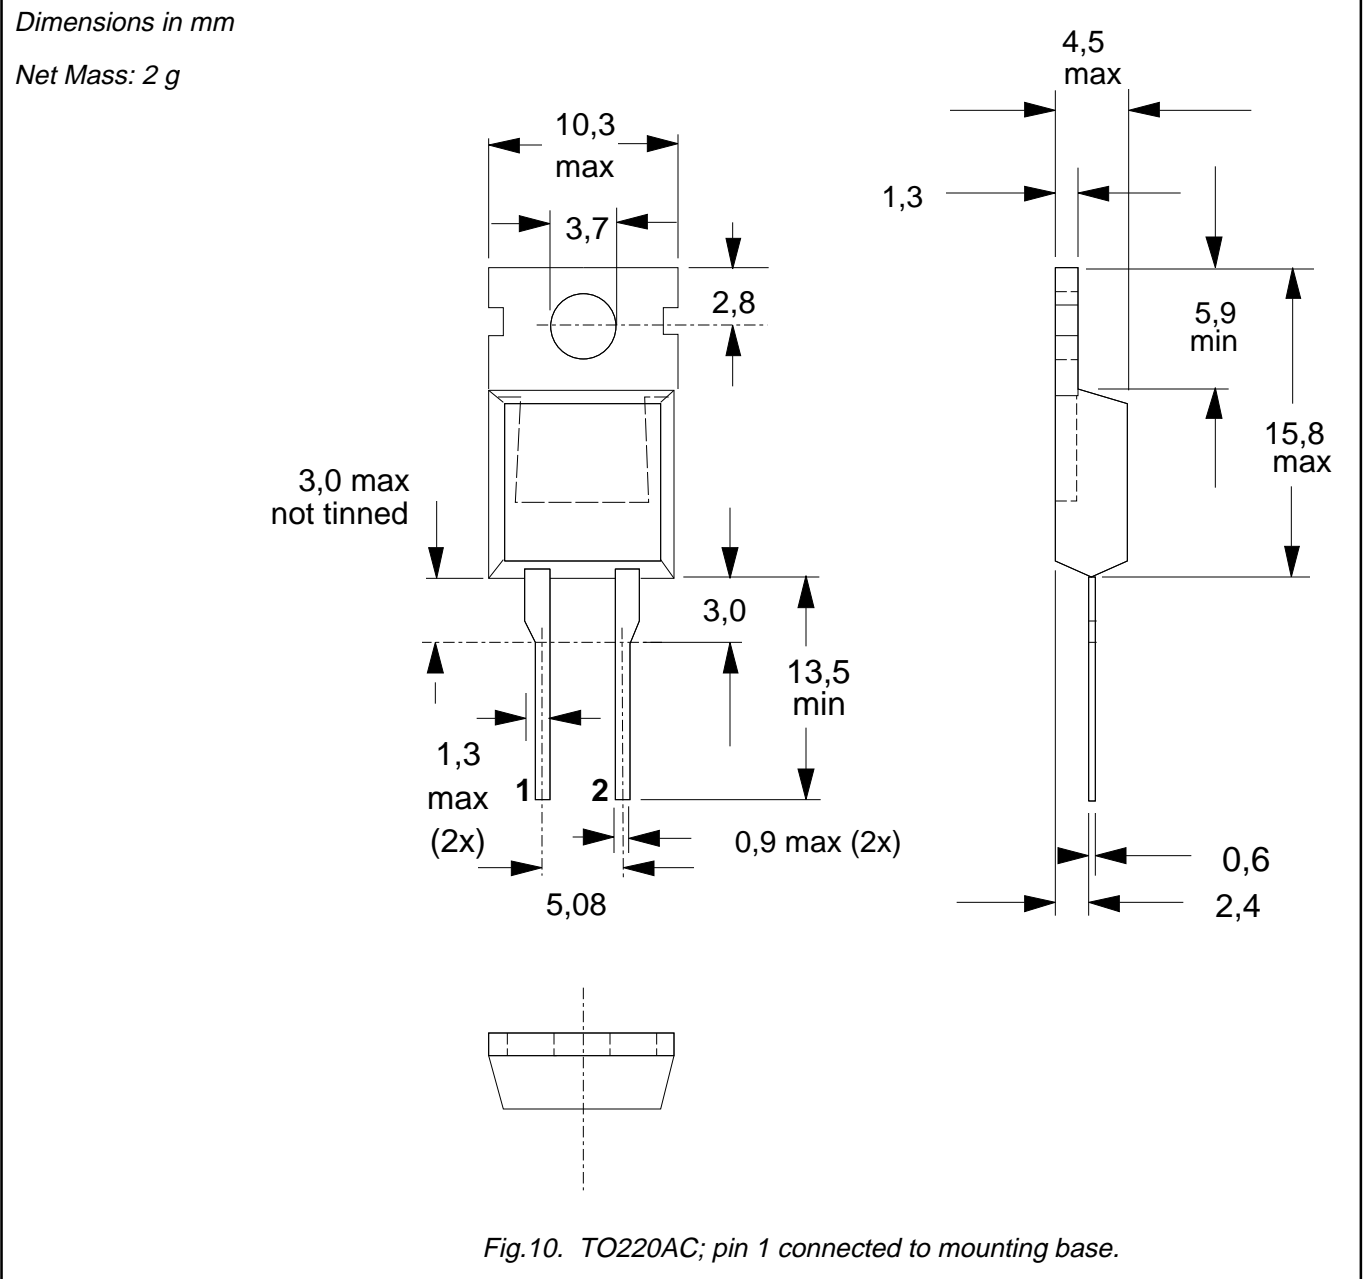

Notes

1. Accessories supplied on request: refer to mounting instructions for TO220 envelopes.
2. Epoxy meets UL94 V0 at 1/8".

**Rectifier diode
fast, high-voltage**

BY459-1500

DEFINITIONS

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	
© Philips Electronics N.V. 1994	
All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.	
The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.