

# Rectifier Diodes

## Avalanche Diodes

$$V_{RRM} = 800 - 1800 \text{ V}$$


$$I_{F(RMS)} = 160 \text{ A}$$

$$I_{F(AV)M} = 110 \text{ A}$$

$V_{RSM}$ V	$V_{(BR)min}$ ① V	$V_{RRM}$ V	Anode on stud	Cathode on stud
900	-	800	DS 75-08B	DSI 75-08B
1300	-	1200	DS 75-12B	DSI 75-12B
1300	1300	1200	DSA 75-12B	DSAI 75-12B
1700	1760	1600	DSA 75-16B	DSAI 75-16B
1900	1950	1800	DSA 75-18B	DSAI 75-18B

① Only for Avalanche Diodes

DO-203 AB

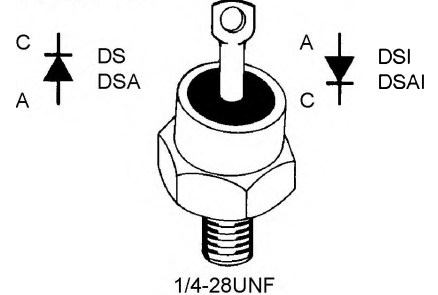

1/4-28UNF

A = Anode C = Cathode

Symbol	Test Conditions	Maximum Ratings	
$I_{F(RMS)}$	$T_{(vj)} = T_{(vj)m}$	160	A
$I_{F(AV)M}$	$T_{case} = 100^\circ\text{C}; 180^\circ \text{ sine}$	110	A
$P_{RSM}$	DSA(I) types, $T_{(vj)} = T_{(vj)m}, t_p = 10 \mu\text{s}$	20	kW
$I_{FSM}$	$T_{(vj)} = 45^\circ\text{C}; V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$	1400 A
		$t = 8.3 \text{ ms (60 Hz), sine}$	1500 A
	$T_{(vj)} = T_{(vj)m}; V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$	1250 A
		$t = 8.3 \text{ ms (60 Hz), sine}$	1310 A
$I^2t$	$T_{(vj)} = 45^\circ\text{C}; V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$	9800 A <sup>2</sup> s
		$t = 8.3 \text{ ms (60 Hz), sine}$	9450 A <sup>2</sup> s
	$T_{(vj)} = T_{(vj)m}; V_R = 0$	$t = 10 \text{ ms (50 Hz), sine}$	7820 A <sup>2</sup> s
		$t = 8.3 \text{ ms (60 Hz), sine}$	7210 A <sup>2</sup> s
$T_{(vj)}$		-40...+180	°C
$T_{(vj)m}$		180	°C
$T_{stg}$		-40...+180	°C
$M_d$	Mounting torque	3.5-4.5	Nm
		31-40	lb.in.
Weight		21	g

### Features

- International standard package, JEDEC DO-203 AB (DO-5)
- Planar glassivated chips

### Applications



- High power rectifiers
- Field supply for DC motors
- Power supplies

### Advantages

- Space and weight savings
- Simple mounting
- Improved temperature and power cycling
- Reduced protection circuits

Dimensions in mm (1 mm = 0.0394")

Symbol	Test Conditions	Characteristic Values	
$I_R$	$T_{(vj)} = T_{(vj)m}; V_R = V_{RRM}$	≤ 6	mA
$V_F$	$I_F = 150 \text{ A}; T_{(vj)} = 25^\circ\text{C}$	≤ 1.17	V
$V_{T0}$	For power-loss calculations only	0.75	V
$r_T$	$T_{(vj)} = T_{(vj)m}$	2	mΩ
$R_{thJC}$	DC current	0.5	K/W
$R_{thJH}$	DC current	0.9	K/W
$d_s$	Creepage distance on surface	4.05	mm
$d_A$	Strike distance through air	3.9	mm
$a$	Max. allowable acceleration	100	m/s <sup>2</sup>









Data according to IEC 747-2

IXYS reserves the right to change limits, test conditions and dimensions

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS Corporation  
 3540 Bassett Street, Santa Clara, CA 95054  
 Tel: 408-982-0700 Fax: 408-496-0670

IXYS Semiconductor  
 Edisonstr. 15, D-68623 Lampertheim, Germany  
 Tel: +49-6206-5030 Fax: +49-6206-503629

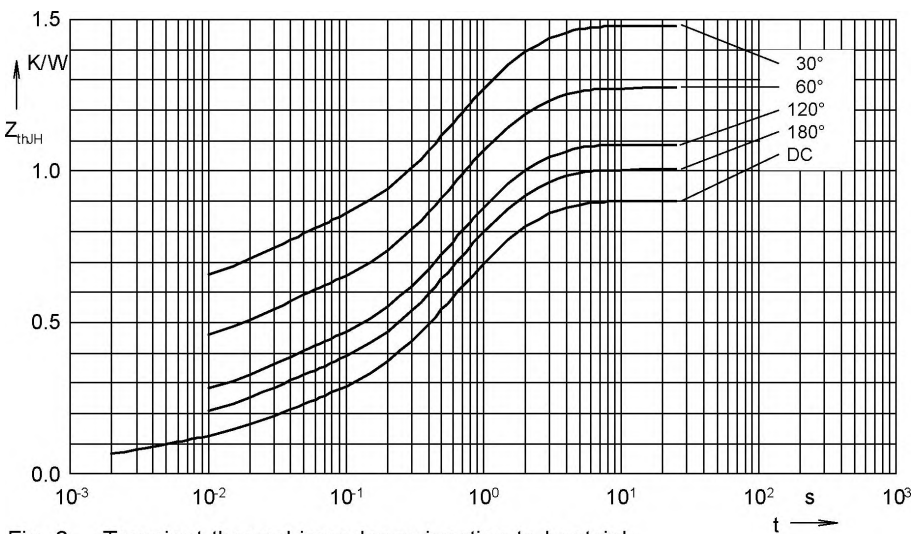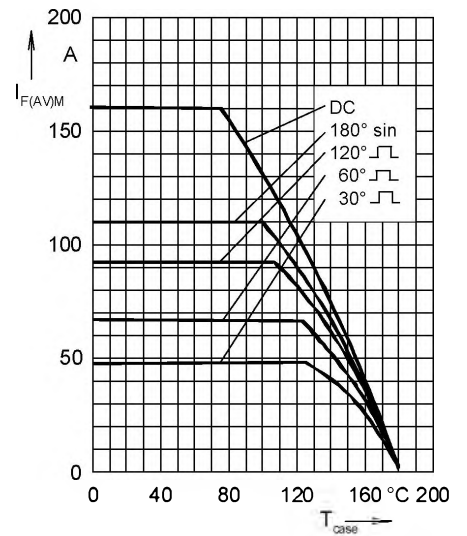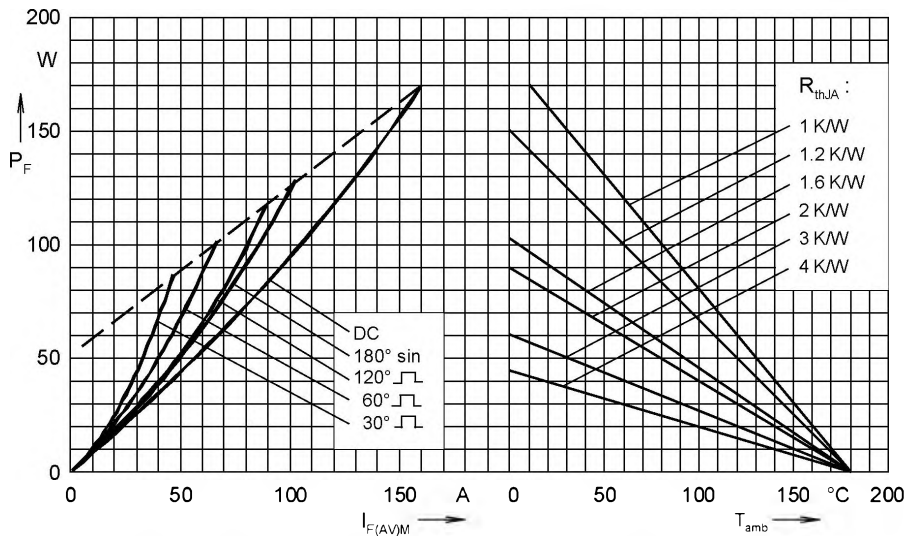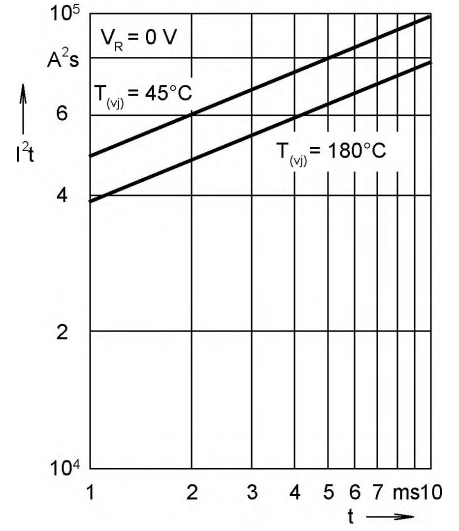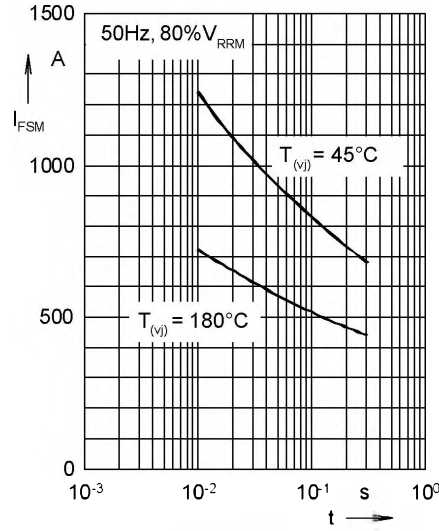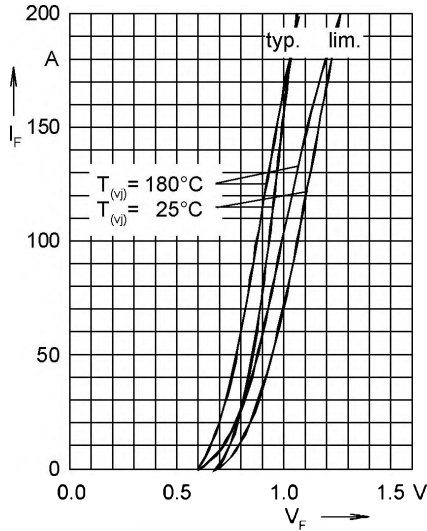

$R_{thJH}$  for various conduction angles  $d$ :

$d$	$R_{thJH}$ (K/W)
DC	0.900
180°	1.028
120°	1.085
60°	1.272
30°	1.476

Constants for  $Z_{thJH}$  calculation:

$i$	$R_{thi}$ (K/W)	$t_i$ (s)
1	0.0731	0.0015
2	0.1234	0.0237
3	0.4035	0.4838
4	0.3000	1.5