



High Voltage Damper Diodes

Reverse Voltage 1500V
 Forward Current 10A
 Reverse Recovery Time 175ns

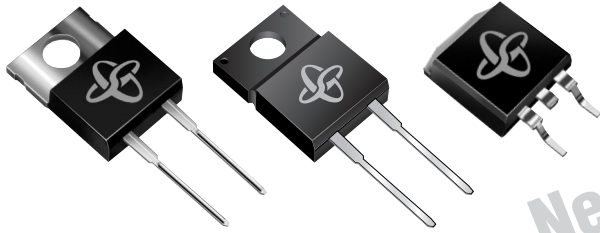


New Product


TO-220AC (DTV32)

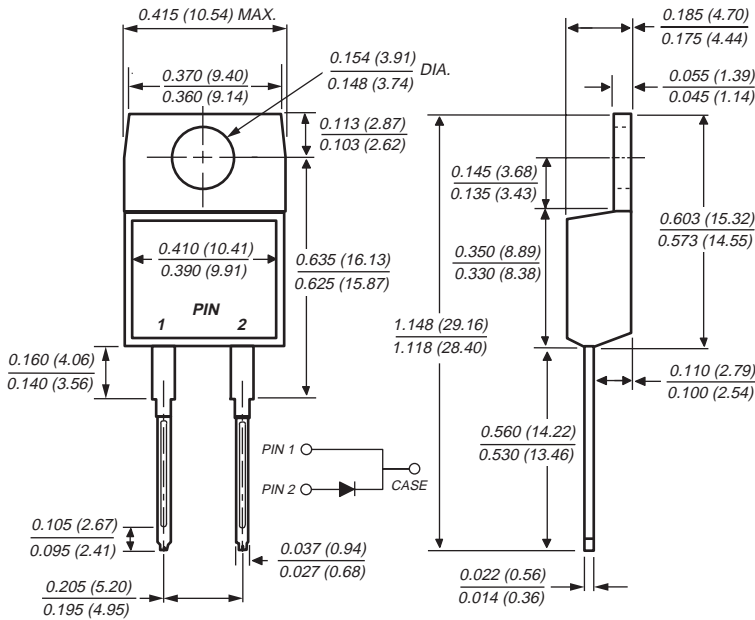


ITO-220AC (DTV32F)

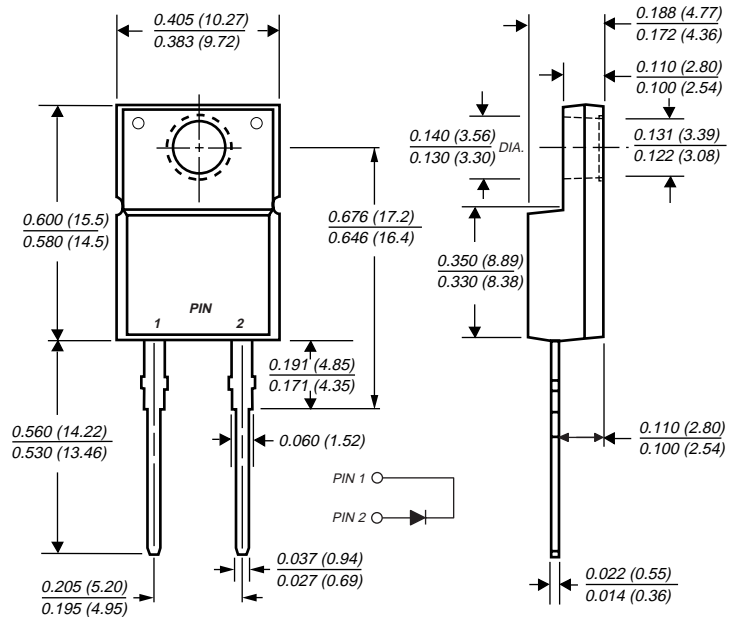

TO-263AB (DTV32B)

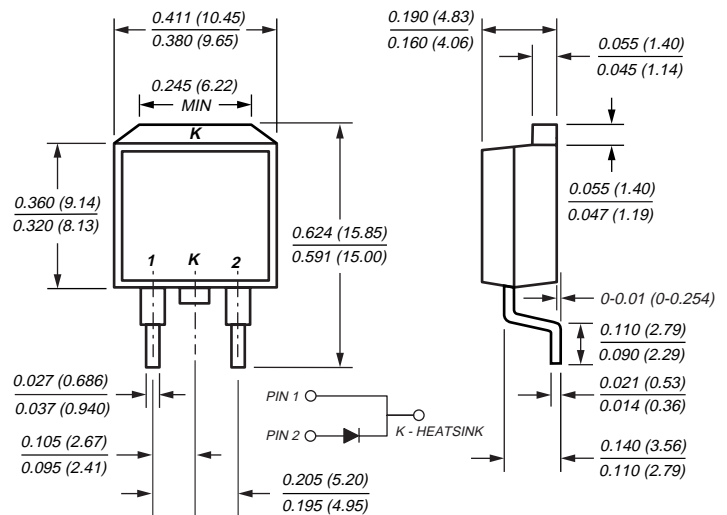

Mounting Pad Layout TO-263AB

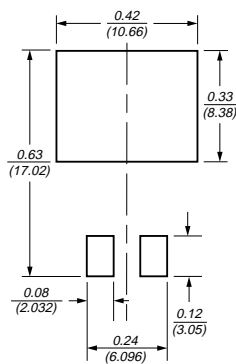

Dimensions in inches and (millimeters)

Mechanical Data

Case: JEDEC TO-220AC, ITO-220AC & TO-263AB molded plastic body

Terminals: Plated leads, solderable per MIL-STD-750, Method 2026

High temperature soldering guaranteed: 250°C/10 seconds, 0.25" (6.35mm) from case for TO-220 & ITO-220; at terminals for TO-263

Polarity: As marked

Mounting Position: Any

Mounting Torque: 10 in-lbs maximum

Weight: 0.08 ounce, 2.24 grams

Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Ideally suited CRT horizontal deflection
- Fast reverse recovery time
- Fast forward recovery time
- Glass passivated chip junction

High Voltage Damper Diodes

Maximum Ratings (T_A = 25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	1500	V
Maximum RMS voltage	V _{RMS}	1050	V
Maximum DC blocking voltage	V _{DC}	1500	V
Maximum average forward rectified current (fig.1)	I _{F(AV)}	10	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) at T _C = 100°C	I _{FSM}	130	A
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150	°C
RMS Isolation voltage (DTV32F types only) from terminals to heatsink with t = 1.0 second, RH ≤ 30%	V _{ISOL}	4500 ⁽¹⁾ 3500 ⁽²⁾ 1500 ⁽³⁾	V

Electrical Characteristics (T_J = 25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Maximum instantaneous forward voltage ⁽⁴⁾ I _F = 6A, T _J = 25°C I _F = 6A, T _J = 125°C	V _F	1.5 1.35	V
Maximum DC reverse current at V _{RRM} T _J = 25°C T _J = 125°C	I _R	100 1.0	μA mA
Maximum reverse recovery time at I _F = 1.0A, di/dt = 50A/μs, V _R = 30V, I _{rr} = 0.1 I _{RM}	t _{rr}	175	ns
Typical forward recovery time I _F = 6A, di/dt = 48A/μs, V _{FR} = 3V,	t _{fr}	280	ns
Peak forward recovery overshoot voltage I _F = 6A, di/dt = 48A/μs, T _J = 100°C	V _{FP}	8 12	V
		Typical Maximum	

Thermal Characteristics (T_A = 25°C unless otherwise noted)

Parameter	Symbol	DTV32	DTV32F	DTV32B	Unit
Typical thermal resistance from junction to case	R _{θJC}	2.0	4.0	2.0	°C/W

Notes: (1) Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset

(2) Clip mounting (on case), where leads do overlap heatsink

(3) Screw mounting with 4-40 screw, where washer diameter is ≤ 4.9 mm (0.19")

(4) Pulse test: 300μs pulse width, 2% duty cycle

Ordering Information

Product	Case	Package Code	Package Option
DTV32	TO-220AC	45	Anti-Static tube, 50/tube, 2K/carton
DTV32F	ITO-220AC	45	Anti-Static tube, 50/tube, 2K/carton
DTV32B	TO-263AB	31	13" reel, 800/reel, 4.8K/carton
		45	Anti-Static tube, 50/tube, 2K/carton
		81	Anti-Static 13" reel, 800/reel, 4.8K/carton

High Voltage Damper Diodes

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 – Forward Current Derating Curve

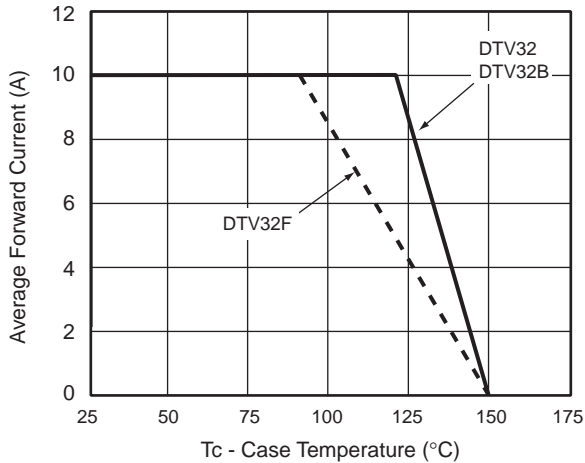


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

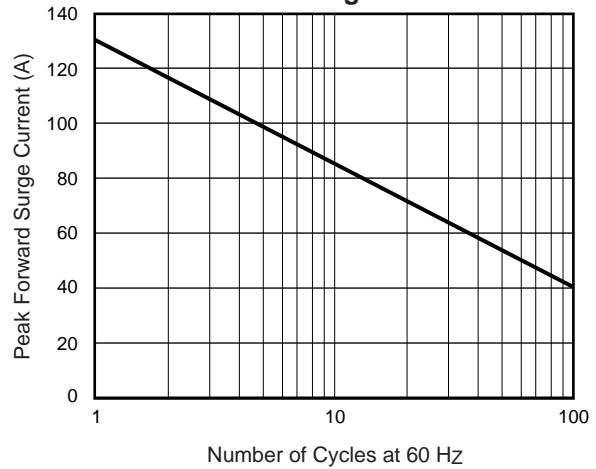


Fig. 3 – Typical Forward Voltage

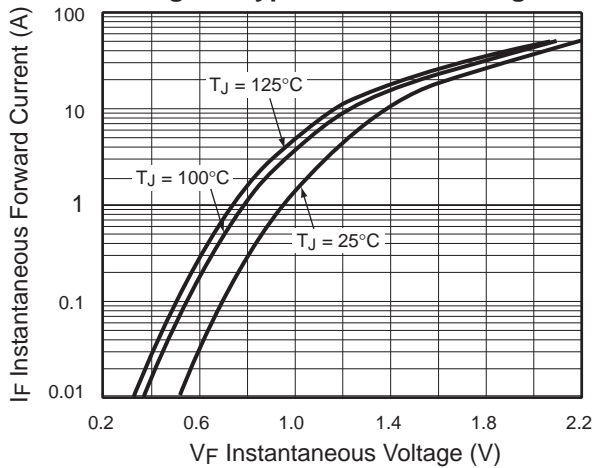


Fig. 4 – Typical Reverse Current

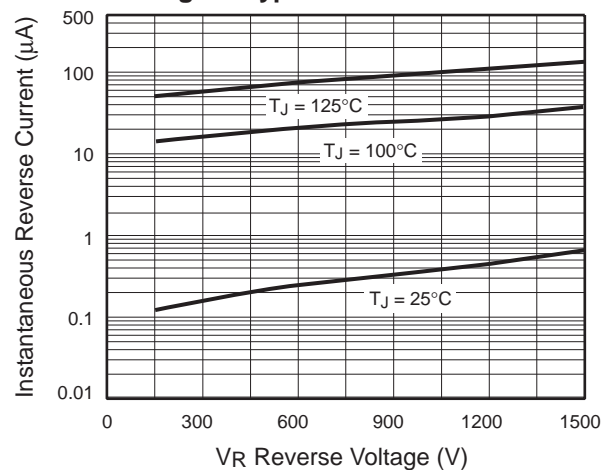


Fig. 5 – Typical Capacitance

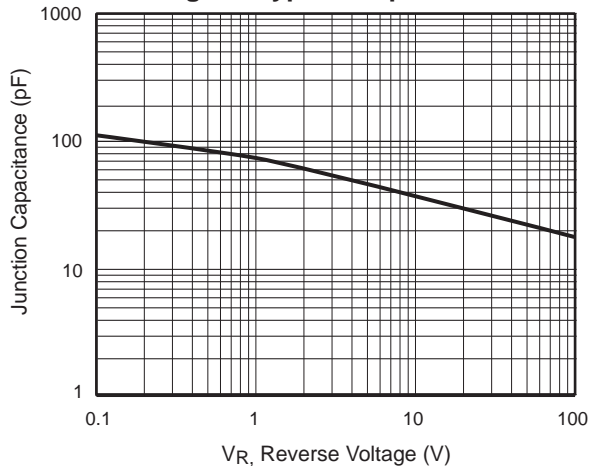


Fig. 6 – Typical Reverse Recovery Time

