



898-A

898-A

TRANSMITTING TRIODE WATER & FORCED-AIR COOLED

GENERAL DATA

Electrical:


Filament: Tungsten, Three-Section Type
 Excitation 1 ϕ AC, 3 ϕ AC, or DC
 Voltage per section. . . 33 volts
 Current per section. . . 70. amp.
(See FILAMENT CONNECTIONS AND EXCITATION CIRCUITS under this type)
 Starting - The current per section should never exceed 105 amperes, even momentarily.

Amplification Factor 45
 Direct Interelectrode Capacitances (Approx.):
 Grid to Plate. 62 μ f
 Grid to Filament 52 μ f
 Plate to Filament. 4.2 μ f

Mechanical:

Terminal Connections:

- Term. 1 - Fil. No. 3
- Term. 2 - Fil. No. 2
- Term. 3 - Fil. No. 1
- Term. 4 - Fil. No. 2
- Term. 5 - Fil. No. 3
- Term. 6 - Fil. No. 1



- G - Ribbon Grid Terminal
- P - Water-cooled Plate Terminal

TERMINAL NO. 5 IS ABOVE GRID ARM

Mounting Position. Vertical only, glass end up
 Maximum Overall Length 60-3/8"
 Greatest Radius. 10"
 Base (with nozzle for air-cooling of filament seal) No. 6628
 Water Jacket (with nozzle for air-cooling of bulb) UT-1289-A
 Gasket RCA Stock No. 17879

Cooling - *Water flow* of 15 to 25 gallons per minute must start before application of any voltages and continue for at least 10 minutes after removal of all voltages. Water temperature must not exceed 70°C at jacket outlet under any conditions of operation.
Air flow of 15 cubic feet per minute in bulb nozzle and 3 cubic feet per minute in filament-seal nozzle is required before the application of any voltages and must continue for at least 10 minutes after removal of voltages to limit the glass temperature to 150°C at the hottest part. The incoming air temperature must not exceed 50°C.

This tube can often be operated with reduced filament voltage as explained on sheet TYPES OF CATHODES in General Section.

A-F POWER AMPLIFIER & MODULATOR - Class B

Maximum Ratings, Absolute Values:

D-C PLATE VOLTAGE 15000 max. . volts
 MAX.-SIGNAL D-C PLATE CURRENT* 7.5 max. . amp.
 MAX.-SIGNAL PLATE INPUT* 100 max. . . kw
 PLATE DISSIPATION* 50 max. . . kw

* Averaged over any audio-frequency cycle of sine-wave form.



TRANSMITTING TRIODE

(continued from preceding page)

Typical Operation:

Unless otherwise specified, values are for 2 tubes

D-C Plate Voltage	12000	volts
D-C Grid Voltage [•]	-100	volts
Peak A-F Grid-to-Grid Voltage	2200	volts
Zero-Sig. D-C Plate Current	2	amp.
Max.-Sig. D-C Plate Current	13	amp.
Effective Load Res. (plate-to-plate)	2000	ohms
Max.-Sig. Driving Power	6	approx.	kw
Max.-Sig. Power Output	90	approx.	kw

R-F POWER AMPLIFIER - Class B Telephony

Carrier conditions per tube for use with a max. modulation factor of 1.0

Maximum Ratings, Absolute Values:

D-C PLATE VOLTAGE	20000	max.	volts
D-C PLATE CURRENT	5	max.	amp.
PLATE INPUT	100	max.	kw
PLATE DISSIPATION	75	max.	kw

Typical Operation:

D-C Plate Voltage	12000	15000	18000	volts
D-C Grid Voltage [•]	-100	-175	-250	volts
Peak R-F Grid Voltage	525	650	775	volts
D-C Plate Current	2.8	3.5	4.2	amp.
Driving Power # **	0.5	0.75	1.1	approx.	kw
Power Output	11	17.5	25	approx.	kw

PLATE-MODULATED R-F POWER AMPLIFIER - Class C Telephony

Carrier conditions per tube for use with a max. modulation factor of 1.0

Maximum Ratings, Absolute Values:

D-C PLATE VOLTAGE	12000	max.	volts
D-C GRID VOLTAGE	-3000	max.	volts
D-C PLATE CURRENT	5	max.	amp.
D-C GRID CURRENT	1.25	max.	amp.
PLATE INPUT	60	max.	kw
PLATE DISSIPATION	50	max.	kw

Typical Operation:

D-C Plate Voltage	12000	volts
D-C Grid Voltage	-800	volts
Peak R-F Grid Voltage	2000	volts
D-C Plate Current	5	amp.
D-C Grid Current #	1	approx.	amp.
Driving Power #	2	approx.	kw
Power Output	45	approx.	kw

•; **, #: See next page.



898-A

898-A

TRANSMITTING TRIODE

(continued from preceding page)

R-F POWER AMPLIFIER & OSCILLATOR - Class C Telegraphy

Key-down conditions per tube without modulation**

Maximum Ratings, Absolute Values:

D-C PLATE VOLTAGE	20000 max. . .	volts
D-C GRID VOLTAGE	-3000 max. . .	volts
D-C PLATE CURRENT	10 max. . .	amp.
D-C GRID CURRENT	1 max. . .	amp.
PLATE INPUT	200 max. . .	kw
PLATE DISSIPATION	100 max. . .	kw

Typical Operation:

D-C Plate Voltage	12000	15000	18000	volts
D-C Grid Voltage	-800	-900	-1000	volts
Peak R-F Grid Voltage	2050	2300	2550	volts
D-C Plate Current	6.25	7.5	8.33	amp.
D-C Grid Current #	0.8	0.85	0.9	approx.	amp.
Driving Power #	1.6	2.0	2.4	approx.	kw
Power Output	50	75	100	approx.	kw

- With a-c filament excitation.
- ** At crest of a-f cycle with modulation factor of 1.0.
- # Subject to wide variations as explained on sheet TUBE RATINGS in General Section.
- ## Modulation essentially negative may be used if the positive peak of the audio-frequency envelope does not exceed 115% of the carrier conditions.


Data on operating frequencies for the 898-A are given on the sheet TRANS. TUBE RATINGS vs FREQUENCY.

898-A



898-A

TRANSMITTING TRIODE

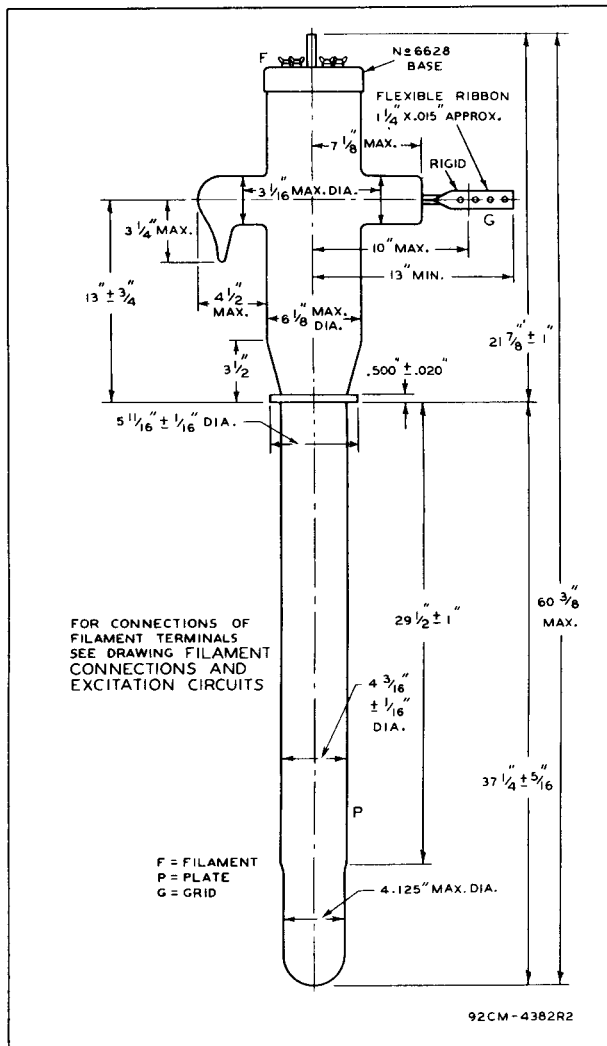

MAR. 30, 1945

 RCA VICTOR DIVISION
 RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY




DATA 2



898-A

898-A

FILAMENT CONNECTIONS AND EXCITATION CIRCUITS

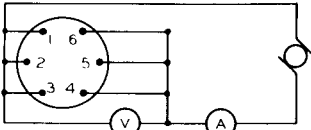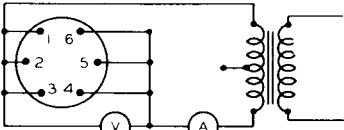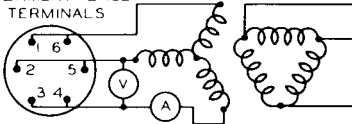
<p>D-C FILAMENT EXCITATION</p>	<p>FILAMENT BASE TERMINALS</p>  <p>V = 33 VOLTS A = 210 AMP.</p>
<p>SINGLE-PHASE A-C FILAMENT EXCITATION</p>	<p>FILAMENT BASE TERMINALS</p>  <p>V = 33 VOLTS A = 210 AMP.</p>
<p>THREE-PHASE A-C FILAMENT EXCITATION</p>	<p>FILAMENT BASE TERMINALS</p>  <p>V = 28.6 VOLTS A = 140 AMP.</p>

898-A



898-A

AVERAGE FILAMENT CHARACTERISTIC

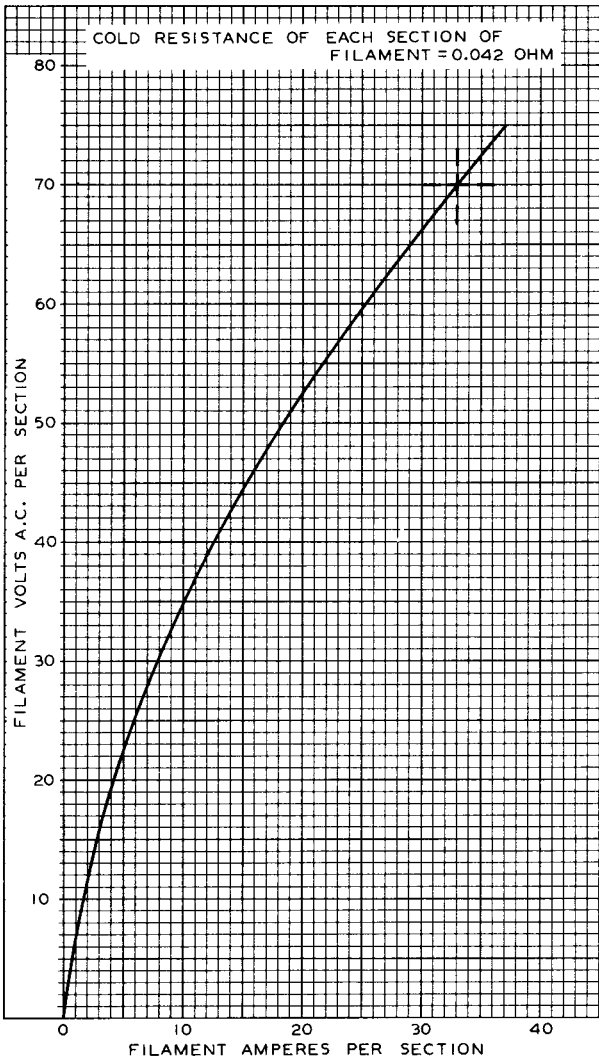

FEB. 3, 1945

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-4389R2



898-A

898-A

AVERAGE FILAMENT-EMISSION CHARACTERISTIC

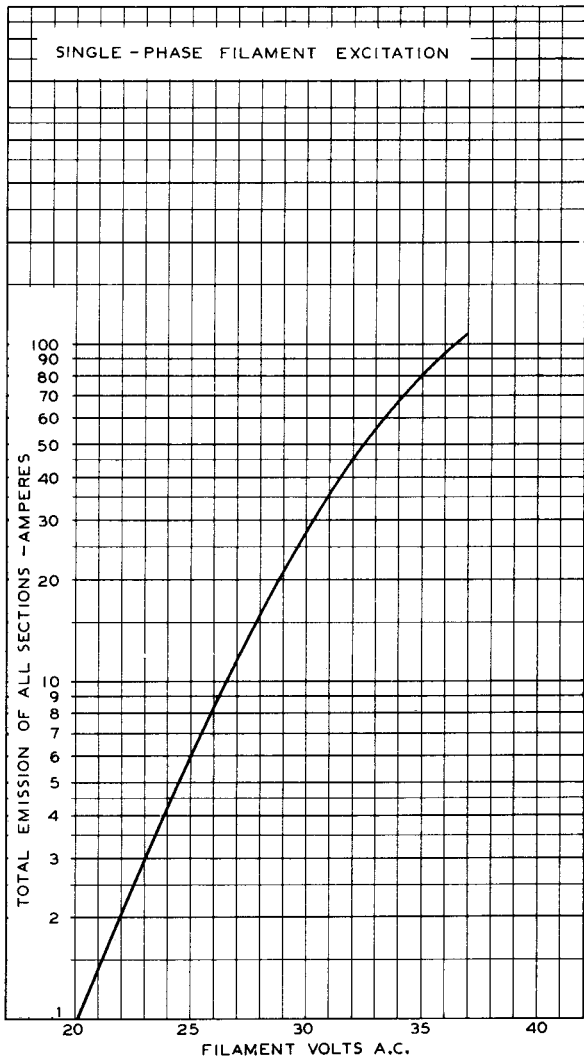

FEB. 8, 1945

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-4390R3

898-A



898-A

AVERAGE PLATE CHARACTERISTICS

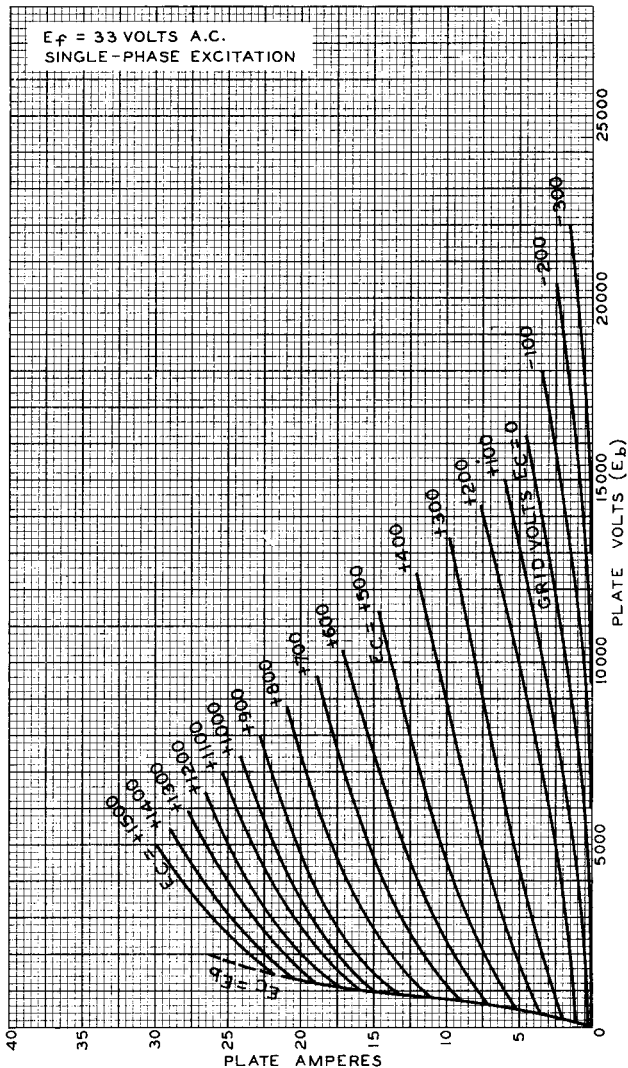

FEB. 7, 1945

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-4383R2



898-A

898-A

TYPICAL CHARACTERISTICS

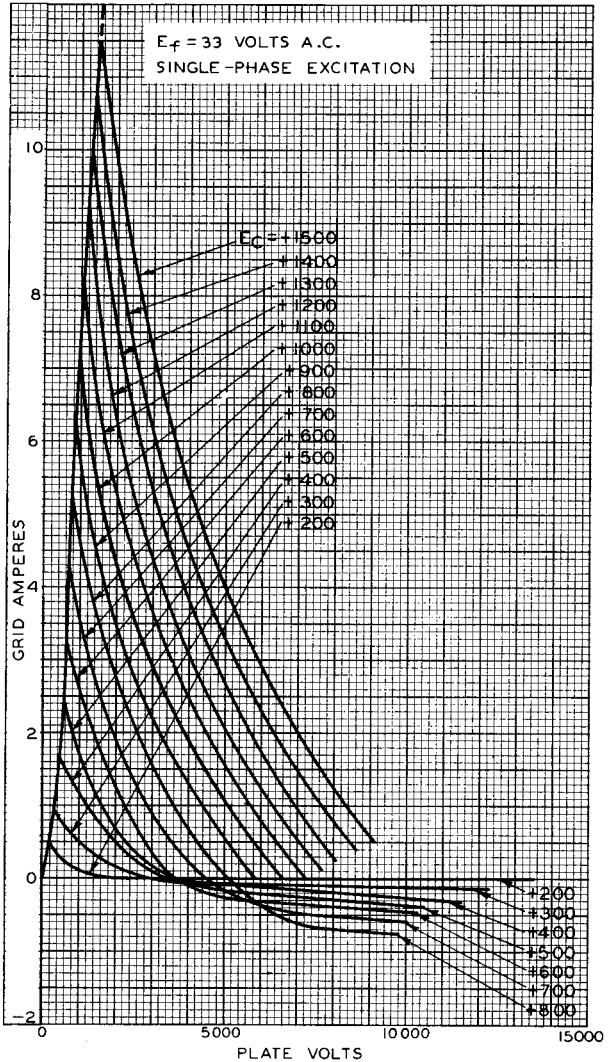

FEB. 9, 1945

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-4384R2

898-A



898-A

AVERAGE CONSTANT-CURRENT CHARACTERISTICS

