


**Pentoda  
(teletransmisyjna)**

**C 3d**

Siemens, RFT

Wzmacniacz w. cz.

7-kołkowy spec.

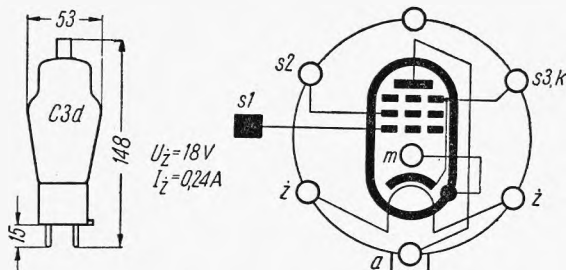

**Wartości robocze**

$U_a$	220	V
$U_{s2}$	200	V
$U_{s1}$	—3	V
$I_a$	14	mA
$I_{s2}$	3,8	mA
$S_a$	4,1	mA/V
$\varrho_a$	550	k $\Omega$
$R_a$	20	k $\Omega$
$R_k$	140	$\Omega$
$P_{wyj}$	1	W
$h$	10	%

**Wartości maksymalne**

$U_{amax}$	300	V
$U_{s2max}$	250	V
$P_{amax}$	4	W
$P_{s2max}$	1,5	W
$R_{s1max}$	300	k $\Omega$
$I_{kmax}$	45	mA
$U_{wlkmax}$	80	V

**Pojemności**

$C_{wej}$	8	pF
$C_{wyj}$	15	pF
$C_{s1/a}$	0,005	pF

TYPY PODOBNE

C 3 e