
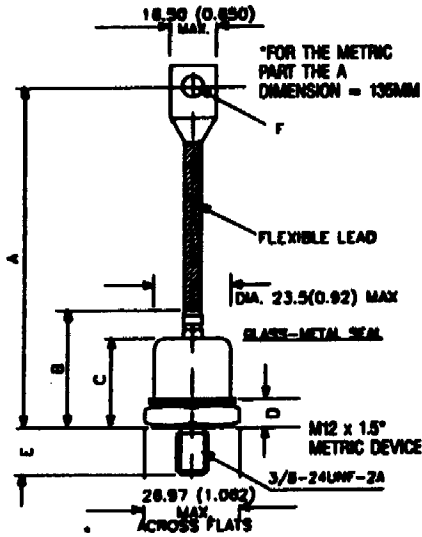


Rectifiers, JEDEC

Rectifiers 150 Amps

Part Number	Voltage	Military Current Rating (A)	Industrial Current Rating (A)	I _{F(AV)} @ T _c		I _{FSM} (I)		R _{th(j-c)} DC (°C/W)	Case Outline Number	Case Style
				(A)	(°C)	50 Hz (A)	60 Hz (A)			
1N3280	200	150	150						3/8	
1N3291	400	150	150							
1N3293	600	150	150							
1N3294	800	150	150							
1N3295	1000	150	150							
1N3289R	200	150	150	100	130	2200	2300	0.4		
1N3291R	400	150	150							
1N3293R	600	150	150							
1N3294R	800	150	150							
1N3296R	1000	150	150							

ADD "R" SUFFIX FOR REVERSE POLARITY.



	A	B	C	D	E	F	
mm	114.3	41.27	27.0	8.81	18.25	8.70	PG A
Inches	4.5	1.625	1.063	0.347	0.64	0.304	
mm	178	38	24.0	12.5	18.25	8.3	PG B
Inches	6.98	1.496	0.945	0.492	0.640	0.32	