


Pentoda

1AD5

RCA

Wzmacniacz kl. A

Subminiaturowy

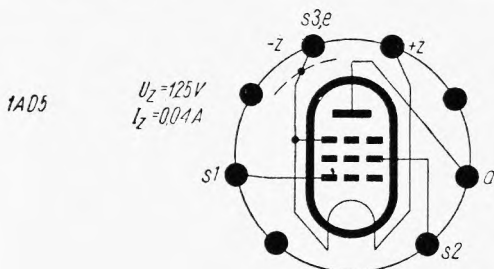

Wartości robocze


U_a	30	45	67,5	V
U_{s1}	0	0	0	V
U_{s2}	30	45	67,5	V
I_{s2}	0,16	0,35	0,75	mA
I_a	0,45	0,9	1,85	mA
r_a	700	700	700	k Ω
S_a	0,43	0,58	0,735	mA/V

Wartości maksymalne

U_{amax}	67,5	V
U_{s2max}	67,5	V
I_{kmax}	4	mA

Pojemności

$C_{s/a}$	0,01	pF
-----------	------	----

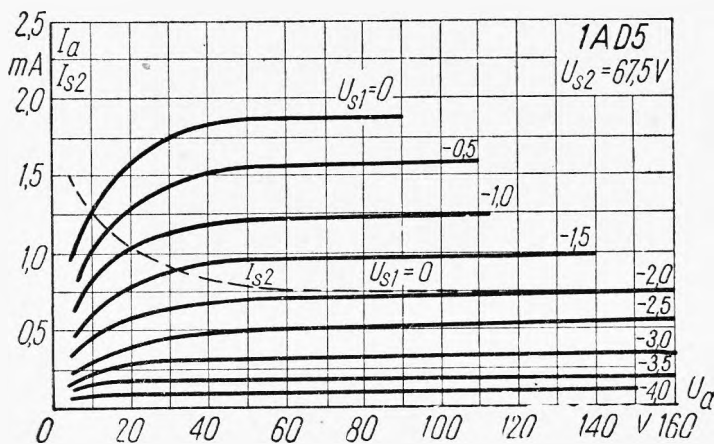

TYPY PODOBNE