


Trioda – heptoda

CCH 2

Philips

Oscylator i mieszacz reg.

Bocznostykowy

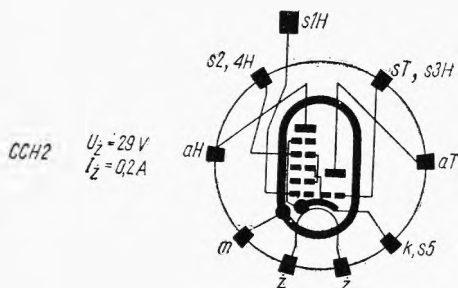

Wartości robocze

| | Heptoda | | Trioda | |
|-------------|------------------|-----|--------|------------|
| U_a | 200 | | 100 | V |
| $U_{s2,4}$ | 100 | | — | V |
| U_{s1} | -2,5... | -25 | -10 | V |
| U_{s3} | -10 | | — | V |
| I_a | 3,5 | — | 9,5 | mA |
| $I_{s2,4}$ | 6,2 | — | — | mA |
| S_a | — | | 5,5 | mA/V |
| S_p | 0,75... < 0,0075 | | — | mA/V |
| ϱ_a | 1,5... 10 | | — | M Ω |
| K_a | — | | 18 | V/V |
| R_a | — | | 30 | k Ω |
| R_k | 150 | | — | Ω |

Wartości maksymalne

| | | |
|-------------|-----|------------|
| U_{amax} | 300 | V |
| U_{s2max} | 125 | V |
| P_{aHmax} | 1,5 | W |
| R_{s1max} | 3 | M Ω |
| R_{sTmax} | 50 | k Ω |
| P_{aTmax} | 1,5 | W |
| I_{kmax} | 25 | mA |

Pojemności

| | | |
|------------|---------|----|
| C_{s1aH} | < 0,015 | pF |
| C_{s1aT} | 3,4 | pF |

TYPY PODOBNE

TCCH 2, UCH 81