













T.			U_f	I_f	$U_b=U_j$	R_a	U_g	I_a	I_j	α°	$U_{a(max)}$	$U_{l(max)}$	$U_{l(min)}$	$U_{f,k}$
			V	A	V	M Ω	V	μ A	mA		V	V	V	V
EM 3	eur	1	6,3	0,2	200	1	0 ÷ -18	175	0,25	10 ÷ 90				
TV 4 A	Mul	1	4	0,3	250	1	0 ÷ -21	220	0,3	10 ÷ 90	250	275	125	
EM 71	eur	2	6,3	0,3	100	0,5	0 ÷ -9	200 ÷ 50	0,6	110 ÷ 0				
HM 71	eur	2	12,6	0,15	200	0,5	0 ÷ -14	400 ÷ 100	1,6	115 ÷ 0				
					250	0,5	0 ÷ -20	500 ÷ 150	2,5	120 ÷ 0	300	300	100	100
ME 41	Maz	3	4	0,5	250	1	-0,5 ÷ -22,5	230	1,16	85 ÷ 0	250	250		
ME 91	Maz	3	9	0,2	150	1	-0,5 ÷ -17	135	2,1	85 ÷ 0				
					175	1	-0,5 ÷ -19	160	2,7	85 ÷ 0	200	200		
ME 920	Maz	4	9	0,2										
VFT 4	Fer	6	4	0,5	100	0,5	0 ÷ -8	190	0,7 ÷ 1	90 ÷ 0				
VME 4	Tu	4	4	0,5										
2 G 5	int	5	2,5	0,8	200	1	0 ÷ -18,5	190	1,5 ÷ 3	90 ÷ 0				
6 G 5	int	5	6,3	0,3										
6 G 5-G	int	6	6,3	0,3	250	1	0 ÷ -22	240	2 ÷ 5	90 ÷ 0	285	285	125	90
12 G 5-G	int	6	12,6	0,15										
Y 73	MOG	6	6	0,16	180	1	0 ÷ -21	250	5	90 ÷ 0				
6 AB 5	amer	5	6,3	0,3	135	0,25	0 ÷ -10	500	2	90 ÷ 0				
					135	1	0 ÷ -15,5	130	1,9	90 ÷ 0	180	180	100	
6 M 1	Maz	6	6,3	0,3	250	1	-0,5 ÷ -22,5	230	1,16	85 ÷ 0	250	250		

Equivalents


AC/ME	Maz = VME 4	Y 63	MOG = 6 G 5-G	6 U 5	int = 6 G 5
AW 5	eur = ME 41	Y 64	MOG = 6 G 5-G	6 U 5-G	int = 6 G 5-G
EM 72	Lor = EM 71	VFT 6	Fer = 6 G 5-G	12 M 71	Lor = HM 71
E 1320	Marc \approx 6 G 5-G	6 H 5	amer = 6 G 5	12 U 5-G	int = 12 G 5-G
Y 61	MOG = 6 G 5-G	6 N 5	amer = 6 AB 5	63 ME	Cos = 6 G 5-G
Y 62	MOG = 6 G 5-G	6 T 5	amer = 6 G 5		

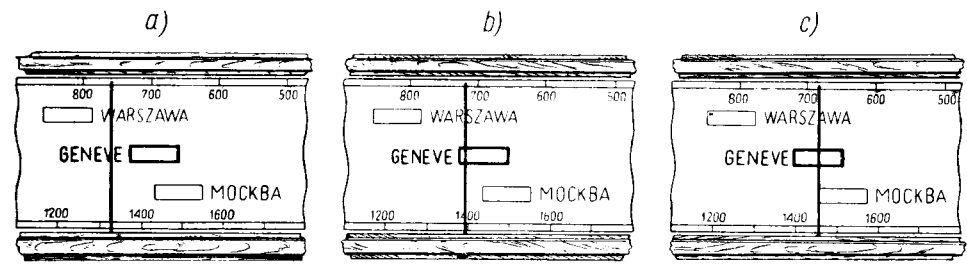


EM3

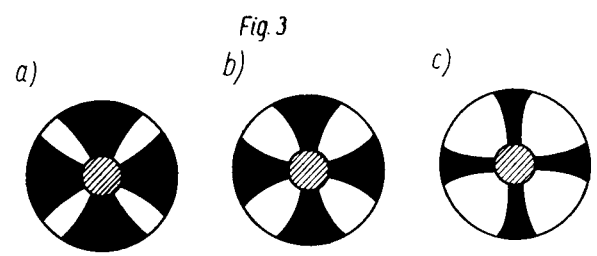

EM72

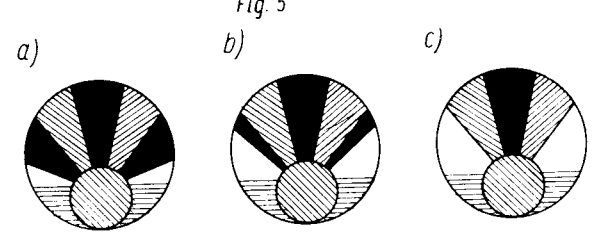

EM71
HM71

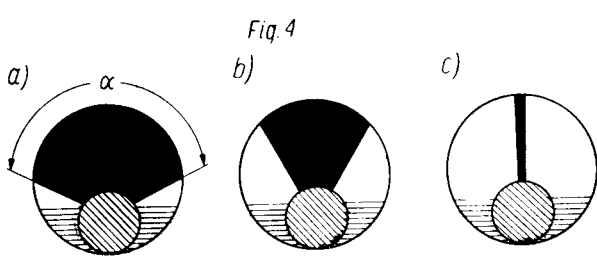

6AB5
6G5
6G5-G

