



UNI-AND BIDIRECTIONAL TRANSIENT VOLTAGE SUPPRESSORS

- HIGH SURGE CAPABILITY :
600 W / 1 ms EXPO
- VERY FAST CLAMPING TIME :
1 ps FOR UNIDIRECTIONAL TYPES
5 ns FOR BIDIRECTIONAL TYPES
- LARGE VOLTAGE RANGE :
5.8 V → 376 V
- ORDER CODE :
TYPE NUMBER FOR UNIDIRECTIONAL
TYPES, TYPE NUMBER + SUFFIX C FOR
BIDIRECTIONAL TYPES



DESCRIPTION

Transient voltage suppressor diodes especially useful in protecting integrated circuits, MOS, hybrids and other voltage-sensitive semiconductors and components.


ABSOLUTE RATINGS (limiting values)

Symbol	Parameter	Value	Unit
P_p	Peak Pulse Power for 1 ms Exponential Pulse	T_j Initial = 25 °C See note 1	600 W
P	Power Dissipation on Infinite Heatsink	$T_{amb} = 75$ °C	5 W
I_{FSM}	Non Repetitive Surge Peak Forward Current for Unidirectional Types	T_j Initial = 25 °C $t = 10$ ms	100 A
T_{sig} T_j	Storage and Operating Junction Temperature Range	- 55 to 175 175	°C °C
T_L	Maximum Lead Temperature for Soldering During 10 s at 4 mm from Case	230	°C

THERMAL RESISTANCE

Symbol	Parameter	Value	Unit
$R_{th(j-l)}$	Junction-leads on Infinite Heatsink for $L_{lead} = 10$ mm	20	°C/W

Note : 1. For surges upper than the maximum values, the diode will present a short-circuit anode-cathode.

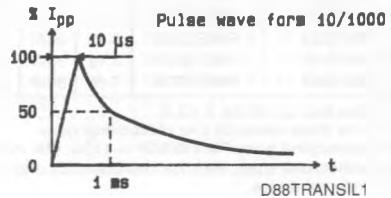

ELECTRICAL CHARACTERISTICS ($T_j = 25\text{ }^\circ\text{C}$)

Symbol	Parameter	Value	
V_{RM}	Stand-off Voltage	See tables	
$V_{(BR)}$	Breakdown Voltage		
$V_{(CL)}$	Clamping Voltage		
I_{PP}	Peak Pulse Current		
α_T	Temperature Coefficient of $V_{(BR)}$		
C	Capacitance		
$t_{clamping}$	Clamping Time (0 volt to $V_{(BR)}$)	Unidirectional Types	1 ps max.
		Bidirectional Types	5 ns max.
V_{FM}	Forward Voltage Drop for Unidirectional Types ($I_{FM} = 50\text{ A}$)	3.5 V max.	

Types		I_{RM} @ V_{RM} max.		$V_{(BR)}^*$ @ I_R (V)			$V_{(CL)}$ @ I_{PP} max. 1 ms expo		$V_{(CL)}$ @ I_{PP} max. 8-20 μ s expo		α_T max.	C** typ $V_R = 0$ f=1 MHz	
Unidirectional	Bidirectional	(μ A)	(V)	min.	nom.	max.	(mA)	(V)	(A)	(V)	(A)	($10^{-6}/^\circ\text{C}$)	(pF)
P	P6KE6V8P	1000§	5.8	6.45	6.8	7.48	10	10.5	57	13.4	261	5.7	4000
	P6KE6V8A	1000§	5.8	6.45	6.8	7.14	10	10.5	57	13.4	261	5.7	4000
P	P6KE7V5P	500§	6.4	7.13	7.5	8.25	10	11.3	53	14.5	241	6.1	3700
	P6KE7V5A	500§	6.4	7.13	7.5	7.88	10	11.3	53	14.5	241	6.1	3700
P	P6KE8V2P	200§	7.02	7.79	8.2	9.02	10	12.1	50	15.5	226	6.5	3400
	P6KE8V2A	200§	7.02	7.79	8.2	8.61	10	12.1	50	15.5	226	6.5	3400
	P6KE9V1P	50§	7.78	8.65	9.1	10	1	13.4	45	17.1	205	6.8	3100
	P6KE9V1A	50§	7.78	8.65	9.1	9.55	1	13.4	45	17.1	205	6.8	3100
	P6KE10P	10§	8.55	9.5	10	11	1	14.5	41	18.6	387	7.3	2800
	P6KE10A	10§	8.55	9.5	10	10.5	1	14.5	41	18.6	387	7.3	2800
	P6KE11P	5§	9.4	10.5	11	12.1	1	15.6	38	20.3	355	7.5	2500
	P6KE11A	5§	9.4	10.5	11	11.6	1	15.6	38	20.3	355	7.5	2500
P	P6KE12P	5	10.2	11.4	12	13.2	1	16.7	36	21.7	332	7.8	2300
	P6KE12A	5	10.2	11.4	12	12.6	1	16.7	36	21.7	332	7.8	2300
P	P6KE13P	5	11.1	12.4	13	14.3	1	18.2	33	23.6	305	8.1	2150
	P6KE13A	5	11.1	12.4	13	13.7	1	18.2	33	23.6	305	8.1	2150
P	P6KE15P	5	12.8	14.3	15	16.5	1	21.2	28	27.2	265	8.4	1900
	P6KE15A	5	12.8	14.3	15	15.8	1	21.2	28	27.2	265	8.4	1900
	P6KE16P	5	13.6	15.2	16	17.6	1	22.5	27	28.9	249	8.6	1800
	P6KE16A	5	13.6	15.2	16	16.8	1	22.5	27	28.9	249	8.6	1800
P	P6KE18P	5	15.3	17.1	18	19.8	1	25.2	24	32.5	222	8.8	1600
	P6KE18A	5	15.3	17.1	18	18.9	1	25.2	24	32.5	222	8.8	1600
P	P6KE20P	5	17.1	19	20	22	1	27.7	22	36.1	199	9.0	1500
	P6KE20A	5	17.1	19	20	21	1	27.7	22	36.1	199	9.0	1500
	P6KE22P	5	18.8	20.9	22	24.2	1	30.6	20	39.3	183	9.2	1350
	P6KE22A	5	18.8	20.9	22	23.1	1	30.6	20	39.3	183	9.2	1350
	P6KE24P	5	20.5	22.8	24	26.4	1	33.2	18	42.8	168	9.4	1250
	P6KE24A	5	20.5	22.8	24	25.2	1	33.2	18	42.8	168	9.4	1250
P	P6KE27P	5	23.1	25.7	27	29.7	1	37.5	16	48.3	149	9.6	1150
	P6KE27A	5	23.1	25.7	27	28.4	1	37.5	16	48.3	149	9.6	1150
P	P6KE30P	5	25.6	28.5	30	33	1	41.5	14.5	53.5	134	9.7	1075
	P6KE30A	5	25.6	28.5	30	31.5	1	41.5	14.5	53.5	134	9.7	1075
P	P6KE33P	5	28.2	31.4	33	36.3	1	45.7	13.1	59	122	9.8	1000
	P6KE33A	5	28.2	31.4	33	34.7	1	45.7	13.1	59	122	9.8	1000
P	P6KE36P	5	30.8	34.2	36	39.6	1	49.9	12	64.3	112	9.9	950
	P6KE36A	5	30.8	34.2	36	37.8	1	49.9	12	64.3	112	9.9	950

* Pulse test $t_p \leq 50\text{ ms}$ $\delta < 2\%$.

** Divide these values by 2 for bidirectional types.

For bidirectional types P6KE6V8CP → 11CA, I_{RM} must be double that specified for unidirectional types

For bidirectional types, electrical characteristics apply in both directions

P: Preferred device.

P6KE6V8P, A → 440P, A/P6KE6V8CP, CA → 440CP, CA

Types		I _{RM} @ V _{RM} max.		V _(BR) * @ I _R (V)			V _(CL) @ I _{PP} max. 1 ms expo		V _{CL} @ I _{PP} max. 8-20 μs expo		α _T max.	C** typ. V _R =0 f=1 MHz			
Unidirectional	Bidirectional	(μA)	(V)	min.	nom.	max.	(mA)	(V)	(A)	(V)	(A)	(10 ⁻⁴ /°C)	(pF)		
P	P6KE39P	P	P6KE39CP	5	33.3	37.1	39	42.9	1	53.9	11.1	69.7	103	10.0	900
	P6KE39A		P6KE39CA	5	33.3	37.1	39	41	1	53.9	11.1	69.7	103	10.0	900
	P6KE43P		P6KE43CP	5	36.8	40.9	43	47.3	1	59.3	10.1	76.8	94	10.1	850
	P6KE43A		P6KE43CA	5	36.8	40.9	43	45.2	1	59.3	10.1	76.8	94	10.1	850
	P6KE47P	P	P6KE47CP	5	40.2	44.7	47	51.7	1	64.8	9.3	84	86	10.1	800
	P6KE47A		P6KE47CA	5	40.2	44.7	47	49.4	1	64.8	9.3	84	86	10.1	800
P	P6KE51P		P6KE51CP	5	43.6	48.5	51	56.1	1	70.1	8.6	91	79	10.2	750
	P6KE51A		P6KE51CA	5	43.6	48.5	51	53.6	1	70.1	8.6	91	79	10.2	750
P	P6KE56P		P6KE56CP	5	47.8	53.2	56	61.6	1	77	7.8	100	72	10.3	700
	P6KE56A		P6KE56CA	5	47.8	53.2	56	58.8	1	77	7.8	100	72	10.3	700
	P6KE62P		P6KE62CP	5	53	58.9	62	68.2	1	85	7.1	111	65	10.4	650
	P6KE62A		P6KE62CA	5	53	58.9	62	65.1	1	85	7.1	111	65	10.4	650
P	P6KE68P		P6KE68CP	5	58.1	64.6	68	74.8	1	92	6.5	121	59.5	10.4	625
	P6KE68A		P6KE68CA	5	58.1	64.6	68	71.4	1	92	6.5	121	59.5	10.4	625
	P6KE75P		P6KE75CP	5	64.1	71.3	75	82.5	1	103	5.8	134	53.5	10.5	575
	P6KE75A		P6KE75CA	5	64.1	71.3	75	78.8	1	103	5.8	134	53.5	10.5	575
P	P6KE82P		P6KE82CP	5	70.1	77.9	82	90.2	1	113	5.3	146	49	10.5	550
	P6KE82A		P6KE82CA	5	70.1	77.9	82	86.1	1	113	5.3	146	49	10.5	550
	P6KE91P		P6KE91CP	5	77.8	86.5	91	100	1	125	4.8	162	44.5	10.6	525
	P6KE91A		P6KE91CA	5	77.8	86.5	91	95.5	1	125	4.8	162	44.5	10.6	525
	P6KE100P		P6KE100CP	5	85.5	95	100	110	1	137	4.4	178	40.5	10.6	500
	P6KE100A		P6KE100CA	5	85.5	95	100	105	1	137	4.4	178	40.5	10.6	500
	P6KE110P		P6KE110CP	5	94	105	110	121	1	152	3.9	195	37	10.7	470
	P6KE110A		P6KE110CA	5	94	105	110	116	1	152	3.9	195	37	10.7	470
	P6KE120P		P6KE120CP	5	102	114	120	132	1	165	3.6	212	34	10.7	450
	P6KE120A		P6KE120CA	5	102	114	120	126	1	165	3.6	212	34	10.7	450
P	P6KE130P		P6KE130CP	5	111	124	130	143	1	179	3.4	230	31.5	10.7	420
	P6KE130A		P6KE130CA	5	111	124	130	137	1	179	3.4	230	31.5	10.7	420
	P6KE150P		P6KE150CP	5	128	143	150	165	1	207	2.9	265	27.2	10.8	400
	P6KE150A		P6KE150CA	5	128	143	150	158	1	207	2.9	265	27.2	10.8	400
	P6KE160P	P	P6KE160CP	5	136	152	160	176	1	219	2.7	282	25.5	10.8	380
	P6KE160A		P6KE160CA	5	136	152	160	168	1	219	2.7	282	25.5	10.8	380
	P6KE170P		P6KE170CP	5	145	161	170	187	1	234	2.6	301	24	10.8	370
	P6KE170A		P6KE170CA	5	145	161	170	179	1	234	2.6	301	24	10.8	370
P	P6KE180P		P6KE180CP	5	154	171	180	198	1	246	2.4	317	22.7	10.8	360
	P6KE180A		P6KE180CA	5	154	171	180	189	1	246	2.4	317	22.7	10.8	360
P	P6KE200P		P6KE200CP	5	171	190	200	220	1	274	2.2	353	20.4	10.8	350
	P6KE200A		P6KE200CA	5	171	190	200	210	1	274	2.2	353	20.4	10.8	350
	P6KE220P		P6KE220CP	5	188	209	220	242	1	301	2	388	18.6	10.8	330
	P6KE220A		P6KE220CA	5	188	209	220	231	1	301	2	388	18.6	10.8	330
P	P6KE250P		P6KE250CP	5	213	237	250	275	1	344	2	442	19	11	310
	P6KE250A		P6KE250CA	5	213	237	250	263	1	344	2	442	19	11	310
	P6KE280P		P6KE280CP	5	239	266	280	308	1	384	2	494	18	11	300
	P6KE280A		P6KE280CA	5	239	266	280	294	1	384	2	494	18	11	300
	P6KE300P		P6KE300CP	5	256	285	300	330	1	414	1.6	529	14	11	290
	P6KE300A		P6KE300CA	5	256	285	300	315	1	414	1.6	529	14	11	290
	P6KE320P		P6KE320CP	5	273	304	320	352	1	438	1.6	564	14	11	280
	P6KE320A		P6KE320CA	5	273	304	320	336	1	438	1.6	564	14	11	280
	P6KE350P		P6KE350CP	5	299	332	350	385	1	482	1.6	618	14	11	270
	P6KE350A		P6KE350CA	5	299	332	350	368	1	482	1.6	618	14	11	270
P	P6KE400P	P	P6KE400CP	5	342	380	400	440	1	548	1.3	706	11	11	360
	P6KE400A		P6KE400CA	5	342	380	400	420	1	548	1.3	706	11	11	360
P	P6KE440P		P6KE440CP	5	376	418	440	484	1	603	1.3	776	11	11	350
	P6KE440A		P6KE440CA	5	376	418	440	462	1	603	1.3	776	11	11	350

* Pulse test t_p ≤ 50 ms δ < 2%.

** Divide these values by 2 for bidirectional types.

For bidirectional types, electrical characteristics apply in both directions.

P: Preferred device

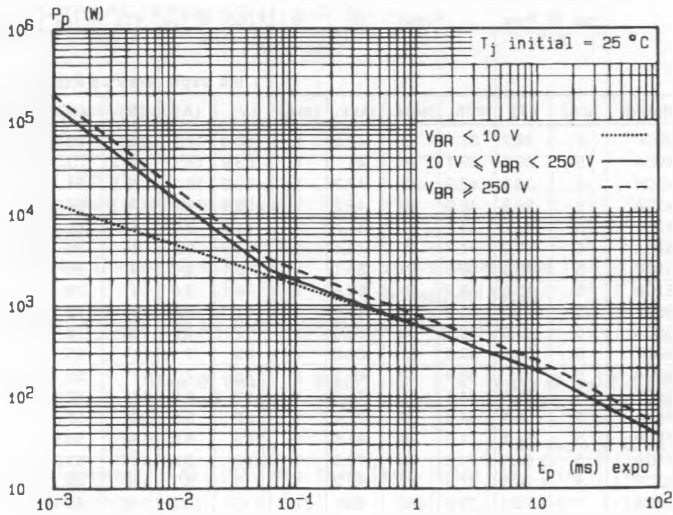


Fig.1 - Peak pulse power versus exponential pulse duration.

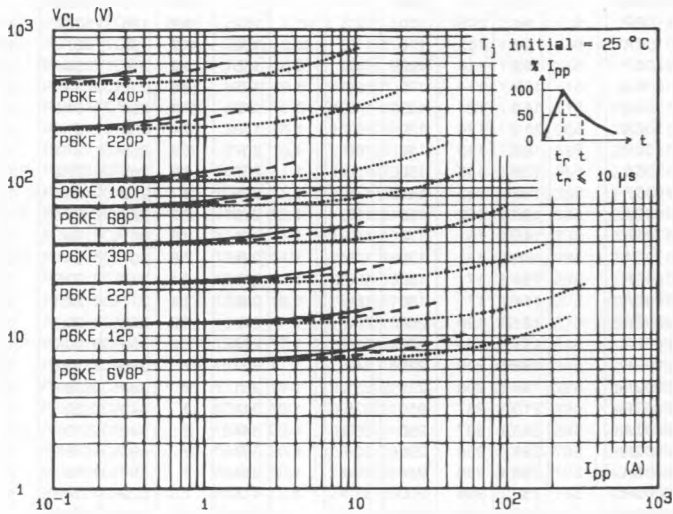


Fig.2 - Clamping voltage versus peak pulse current.
 exponential waveform $t = 20$ μ s
 $t = 1$ ms ----
 $t = 10$ ms ———

Note : The curves of the figure 2 are specified for a junction temperature of 25 °C before surge. The given results may be extrapolated for other junction temperatures by using the following formula : $\Delta V (BR) = \alpha \gamma (V (BR)) \times [T_j - 25] \times V (BR)$
 For intermediate voltages, extrapolate the given results.

D88P6KEP4

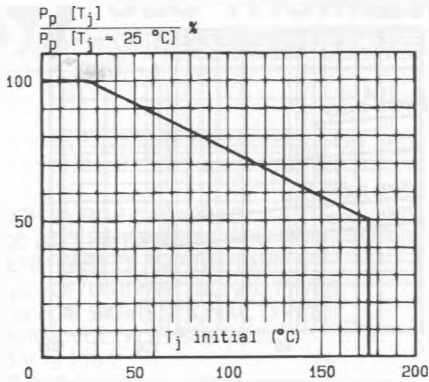


Fig. 3 - Allowable power dissipation versus junction temperature.

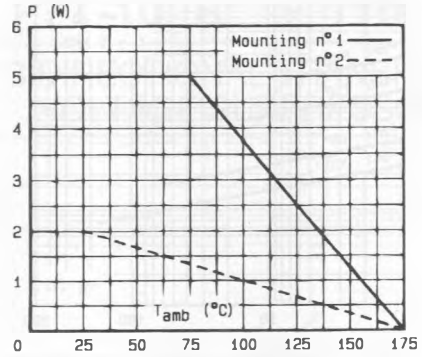


Fig. 4 - Power dissipation versus ambient temperature.

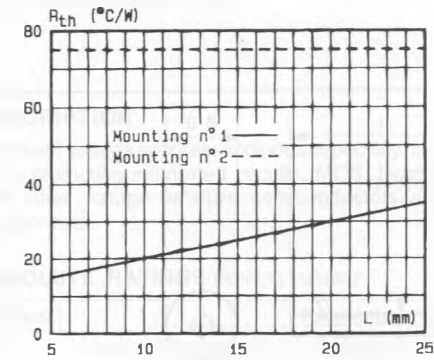


Fig. 5 - Thermal resistance versus lead length.

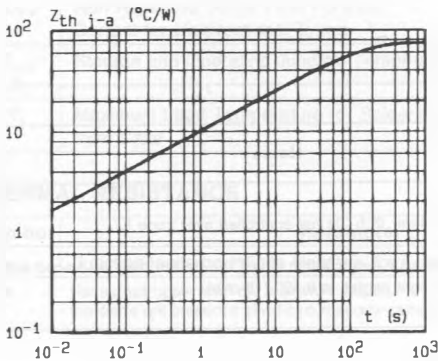


Fig. 6 - Transient thermal impedance junction-ambient for mounting n°2 versus pulse duration (L = 10 mm).

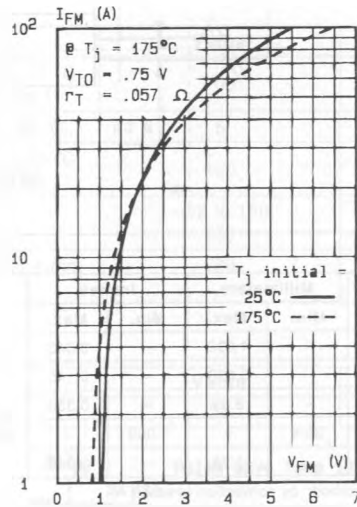
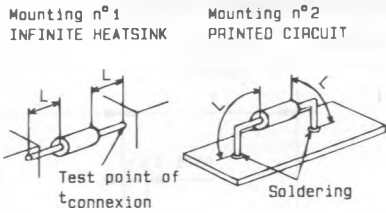


Fig. 7 - Peak forward current versus peak forward voltage drop (typical values for unidirectional types).

D88P6KEP5

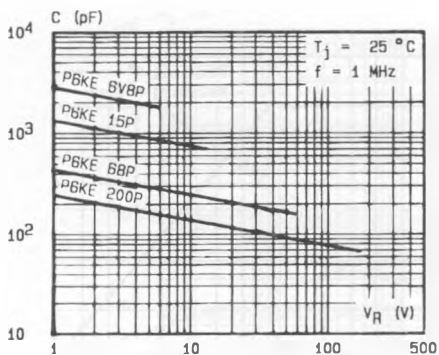


Fig.8a - Capacitance versus reverse applied voltage for unidirectional types (typical values).


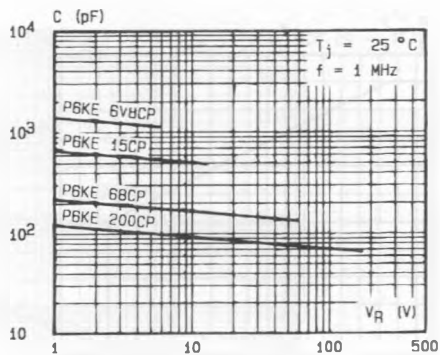


Fig.8b - Capacitance versus reverse applied voltage for bidirectional types (typical values).

D88P6KEP6

PACKAGE MECHANICAL DATA

CB-417 Plastic

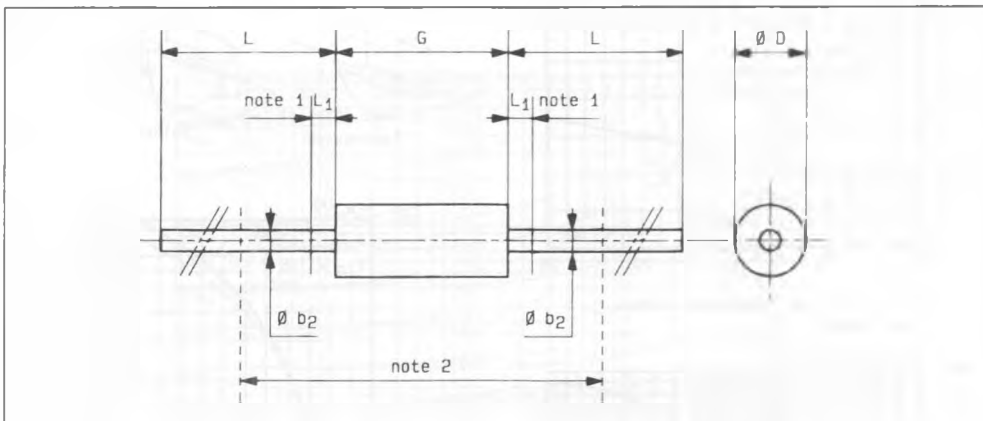

Ref.	Millimeters		Inches		Notes
	Min.	Max.	Min.	Max.	
Ø b ₂	-	1.092	-	0.043	1 - The lead diameter Ø b ₂ is not controlled over zone L ₁ .
Ø D	-	3.683	-	0.145	
G	-	8.89	-	0.350	2 - The minimum axial length within which the device may be placed with its leads bent at right angles is 0.59" (15 mm).
L	25.4	-	1.000	-	
L ₁	-	1.25	-	0.049	

Cooling method : by convection (method A).

Marking : type number ; white band indicates cathode for unidirectional types

Weight : 0.6 g